


CamControl LITE




Software for stand-alone applications for operation, alarm verification and configuration

- Intuitive operation due to integrated reference image function and freely configurable camera groups
- Administration of up to 6000 VideoGateways
- Software-based cascading of up to 100 VideoGateways
- Online evaluation of pre-alarm sequences and hard disk archives with optimized speed or optimized functionality
- Automatic connection with transmitter generated alarms, freely programmable dial-in tours and callback functionality
- HTconnect enables unrestricted, but safe access over the Internet to Firewall protected video systems (also with dynamic IP-addresses) in private nets. Additionally HTconnect controls permanently the availability of the entire system from public net over private net to video transmitters
- Comprehensive evaluation of cash register-/cash machine-/filling station-/access control-/scanner-data and associated video recordings (e.g. search for cash register date/time, item description, price)
- Automatic recording of all received video images to individually configurable PC receiver archive
- Local storage of transmitter configuration profile and upload for reconfiguration
- Configuration of up to 5 privacy zones per camera
- Multi image view with automatic transmitter identification
- Custom designed camera remote control, taking into consideration the particular functionalities of all usual PTZ remote systems
- User and location specific password administration
- All device functionalities available via IP (LAN/WLAN, Internet, DSL, GPRS, HSDPA, CDMA, UMTS, EDGE) and dial-up (PSTN/ POTS, ISDN, GSM, HSCSD)
- Event logging of essential basic functionalities
- Downwards compatible with all HeiTel video transmitters manufactured to date
- Multilingual user interface for all standard products: English, French, German, Italian, Spanish

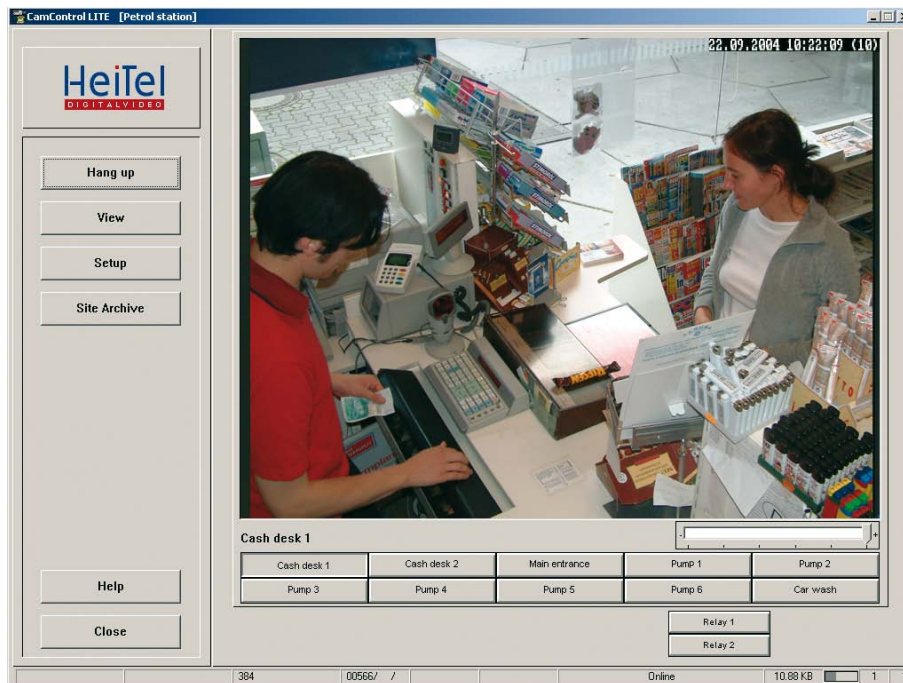





Freely configurable camera groups

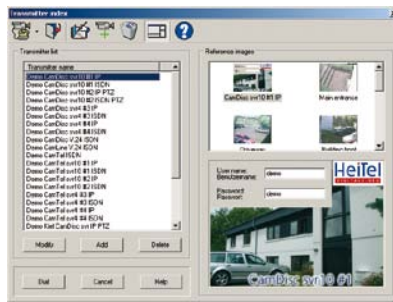


Offline Mode: Transmitter index with reference pictures

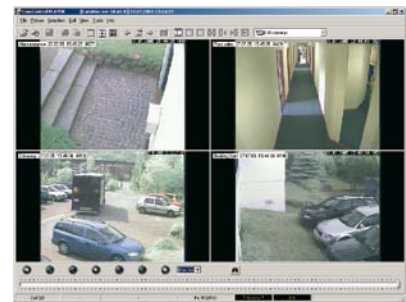

Offline Mode: Receiver archive evaluation with CamControl PLAYER

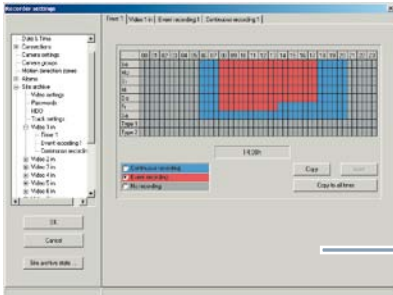


Schedule-controlled recording

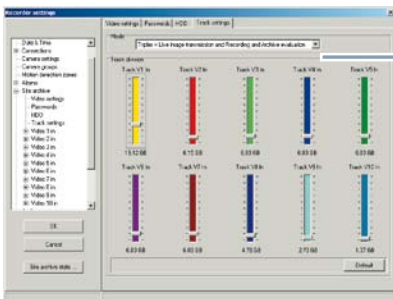


Allocation of hard disk space



Advanced Motion Detection with freely definable detection zones

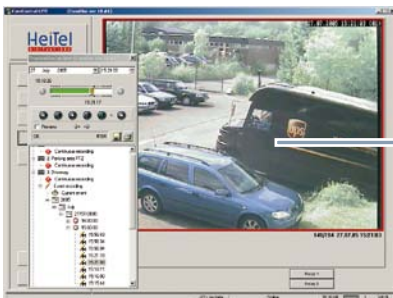

Site archive evaluation (example CamDisc SVR)

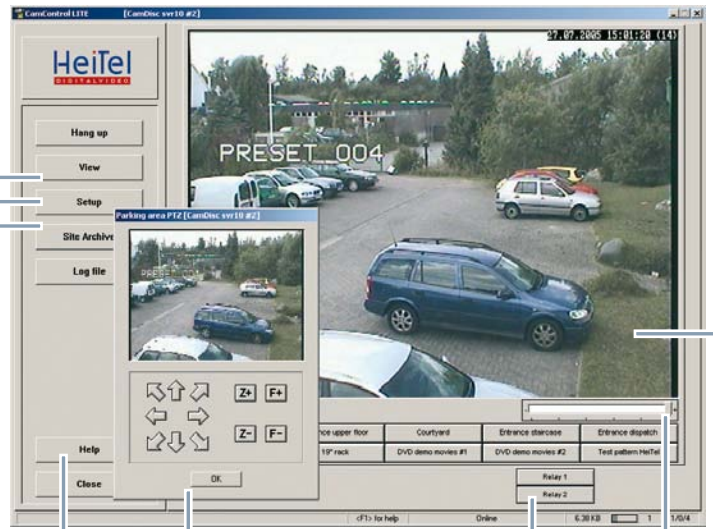

Online help

PTZ-remote control

Two relay outputs for application specific remote control (e.g. barrier, light)

Thumb slider for image quality/transmission speed

ETHERNET (TCP/IP DSL) ISDN PSTN/POTS GSM HSCSD UMTS/3G

System Requirements

CPU	1 GHz Pentium
Memory	256 MB RAM
Operating system	Windows® VISTA, Win 7, XP
Hard disk capacity	54 MB hard disk capacity for CamControl LITE Additional hard drive capacity as a function of the size of the reference pictures and the PC receiver archive
Graphic Card	65536 colours and a resolution up from 1024 x 768 pixels
COM interface	Integrated COM interface with UART (16550) for video remote transmission with external ISDN TA and/or MODEM
Data transmission	External ISDN TA and/or internal ISDN Card and/or MODEM and/or integrated Ethernet adapter
Audio transmission (optionally)	Soundadapter (Soundblaster®-compatible) for audio transmission (according to the application: speaker, mikrophone, head set)
Drive	CD ROM compatible hard drive
Certificate	FIDUCIA certified starting from CamControl LITE 3.90

Your authorised dealer

Errors and omissions excepted, technical specification and availability are subject to change without notice