

POS/ATM Adapter




Adapter for image-synchronous data recording of one cash register-/cash machine-/filling station-/access control-/scanner system


- Recording of transaction data from all major cash registers and cash machines with image-synchronous recording in CamServer, CamDisc SVR and CamDisc HNVR video archives
- POS/ATM Adapter available with 1 channel (data ports, video inputs)
- Optional display of transaction data in the video image of all connected POS and ATM cameras
- Remote evaluation, configuration and maintenance including upload functionality for new protocols over CamServer, CamDisc SVR and CamDisc HNVR specific IP and dial-up connections

- Comprehensive evaluation of cash register-/cash machine-/filling station-/access control-/scanner-data and associated video recordings (e.g. search for cash register, date/time, item description, price) with logic AND/OR operators
- Cascading: operating of multiple POS/ATM Adapters in any combination with one or multiple CamServer, CamDisc SVR and CamDisc HNVR possible
- Connection to the POS/ATM system possible both via RS-232 and Ethernet interfaces
- Mixed operation of various POS/ATM and access control systems with one adapter possible



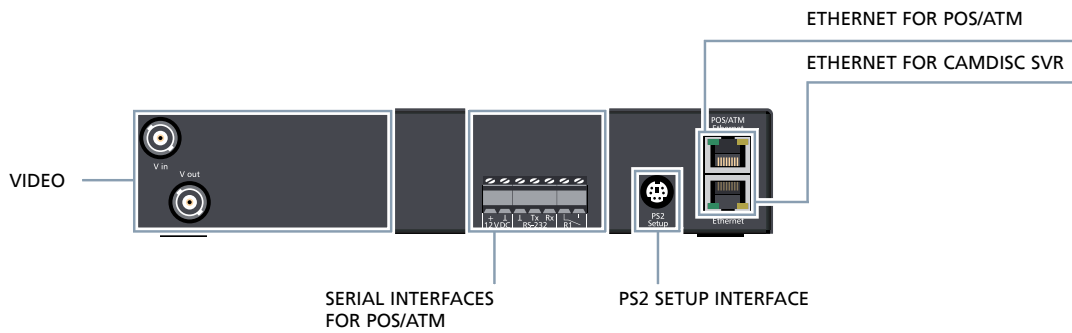

Example with cash register data

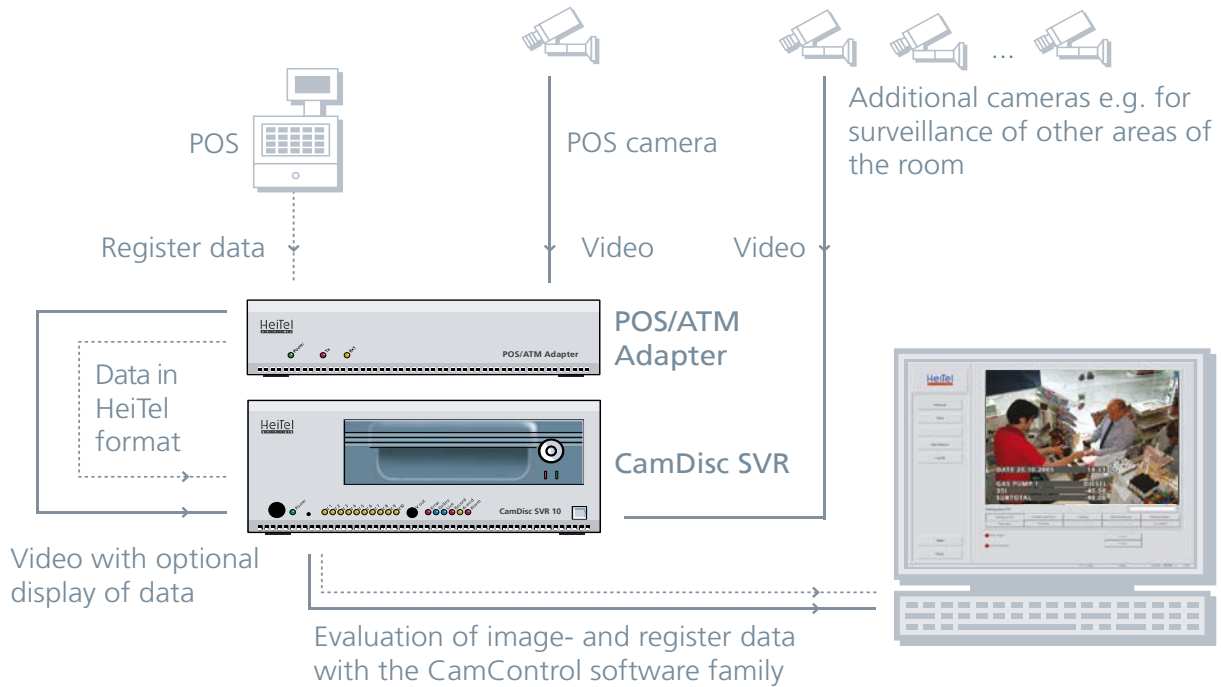

Video	
Videostandard CamServer, CamDisc SVR, CamDisc HNVR	CCIR/PAL and EIA/NTSC
Transmission, Recording	
General (in combination with CamServer, CamDisc SVR, CamDisc HNVR)	Video and audio transmission, recording and playback at the same time; online evaluation via local and remote receiver station or offline via removable HDD
Interfaces	
Serial	1 RS-232 interface for connection of POS/ ATM systems
Ethernet	connection to IP-based POS/ATM systems
Ethernet	connection to CamServer, CamDisc SVR, CamDisc HNVR
General	
Display element	Status LED
Power Supply	External switched power supply, 100 - 240V AC, 50/60 Hz, 42 W, 12V DC at max. 4 A

Ambient temperature	+5°C ... +40°C (+41°F ... +104°F)
Housing/Enclosure	Desktop and wall mounting: 221 x 44 x 155 mm (WxHxD), 19" mounting: 1/2 19" x 1 RU x 275 mm (WxHxD)
Weight	1.5 kg
Approvals	CE (EN 61000-6-3, EN 55022, K.I.B., EN 61000-3-2, EN 61000-3-3, EN 61000-6-2, EN 61000-4-2, -3, -4, -5, -6, EN 50204, EN 50130-4), FIDUCIA (starting from CamControl LITE 3.70)
Options	19" Mount Kit (1 RU)
Warranty	24 month

Your authorised dealer

Errors and omissions excepted, technical specification and availability are subject to change without notice