

FCC Declaration of Conformity

The manufacturer HeiTel Digital Video GmbH
Stuthagen 25
24113 Molfsee
Germany

hereby declares that the product CamTel SVR 10, FastScan 2-10 (product name)
HeiTel 4610 (model number)
CamTel SVR 4, FastScan 2-4 (product name)
HeiTel 4604 (model number)

has been tested and complies with the requirements of FCC Part 15 Subpart B (Class B).

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Molfsee, 31.08.2011



C. Heinemann, Managing Director
HeiTel Digital Video GmbH

1.1 Störstrahlung 3m 30-200MHz hor.pol.

E.U.T. : CamTel svr 10 SN: TV180001 mit Netzteil A2-50S12R-V SN: R00112200179


Test Procedure: DIN EN 55022

Comment :

Test Engineer : P.Sell

Receiver : ESS

Start Freq.	Stop Freq.	Bandw.	Step	Detector	Transducer
30.000 MHz	200.000 MHz	120.000 kHz	40.000 kHz	PEAK	Bicon.Ant,3m

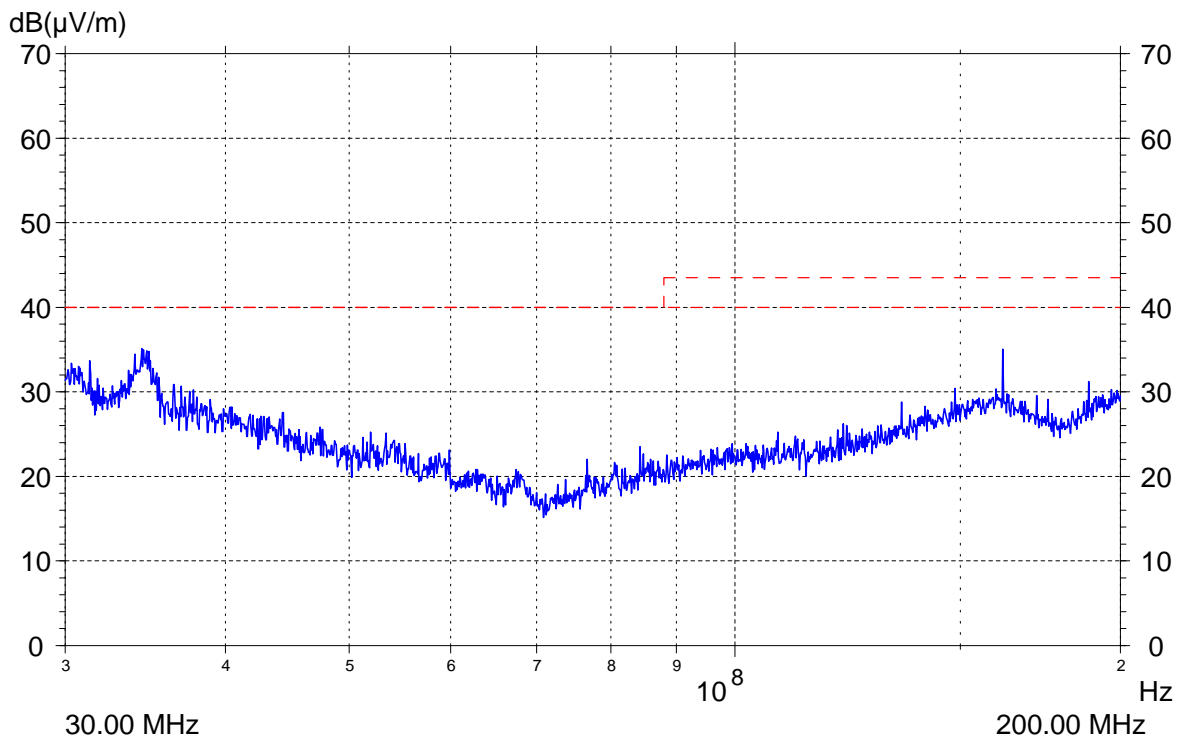

1.2 Störstrahlung 3m 30-200MHz vert.pol.

E.U.T. : CamTel svr 10 SN: TV180001 mit Netzteil A2-50S12R-V SN: R00112200179


Test Procedure: DIN EN 55022

Comment :

Test Engineer : P.Sell

Receiver : ESS

Start Freq.	Stop Freq.	Bandw.	Step	Detector	Transducer
30.000 MHz	200.000 MHz	120.000 kHz	40.000 kHz	PEAK	Bicon.Ant,3m

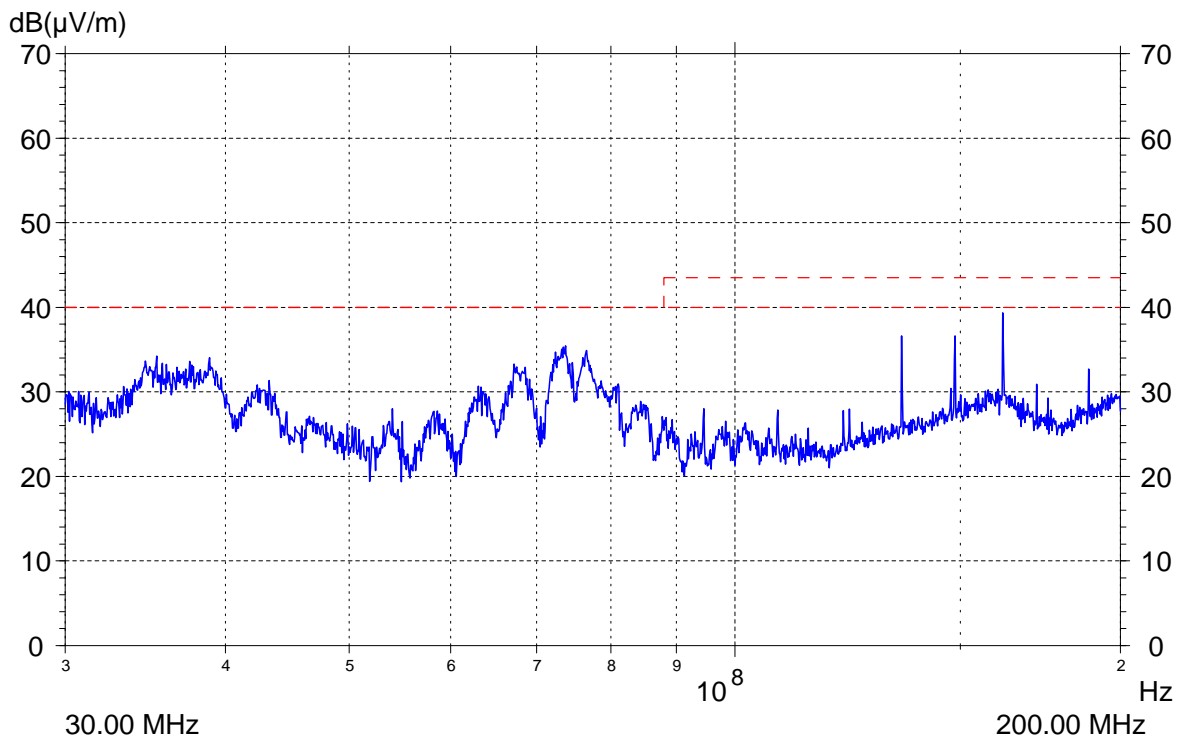

1.3 Störstrahlung 3m 200-1000MHz vert.pol.

E.U.T. : CamTel svr 10 SN: TV180001 mit Netzteil A2-50S12R-V SN: R00112200179 Ferrit am 12V Eingang


Test Procedure: DIN EN 55022

Comment :

Test Engineer : P.Sell

Receiver : ESS

Start Freq.	Stop Freq.	Bandw.	Step	Detector	Transducer
200.000 MHz	1.000 GHz	120.000 kHz	40.000 kHz	PEAK	AT1000

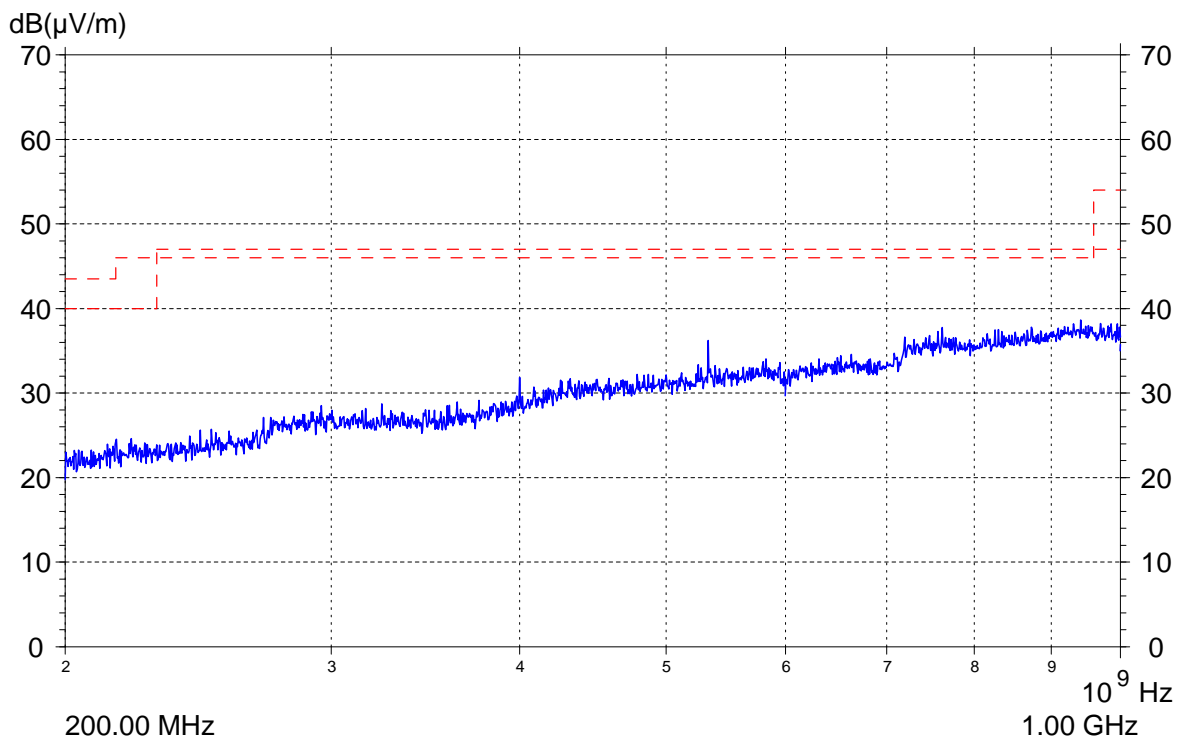

1.4 Störstrahlung 3m 200-1000MHz hor.pol.

E.U.T. : CamTel svr 10 SN: TV180001 mit Netzteil A2-50S12R-V SN: R00112200179 Ferrit am 12V Eingang


Test Procedure: DIN EN 55022

Comment :

Test Engineer : P.Sell

Receiver : ESS

Start Freq.	Stop Freq.	Bandw.	Step	Detector	Transducer
200.000 MHz	1.000 GHz	120.000 kHz	40.000 kHz	PEAK	AT1000

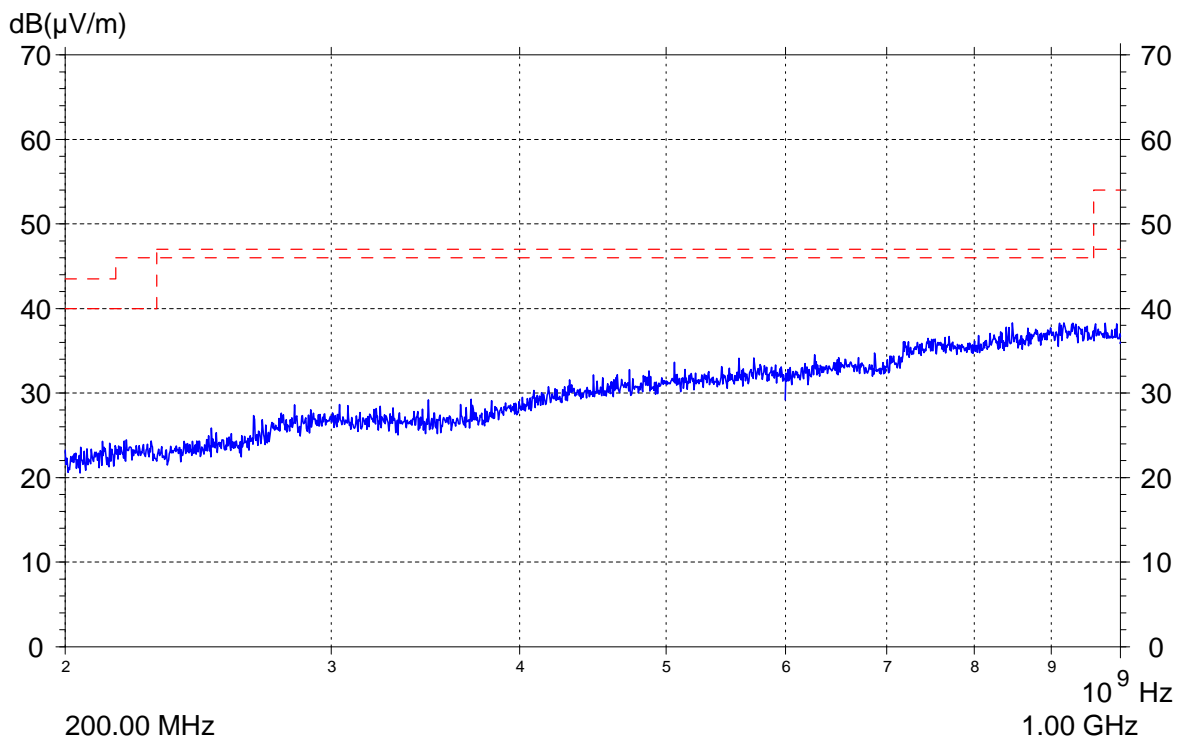

1.5 Meßblatt Störspannung (150kHz-30MHz) 230V N Peak

E.U.T. : CamTel svr 10 SN: TV180001 mit Netzteil A2-50S12R-V SN: R00111700013


Test Procedure: DIN EN 55022

Comment :

Test Engineer : P.Sell

Receiver : ESS

Start Freq.	Stop Freq.	Bandw.	Step	Detector	Transducer
150.000 kHz	30.000 MHz	9 kHz-10 kHz	5.000 kHz	PEAK	Solar8028

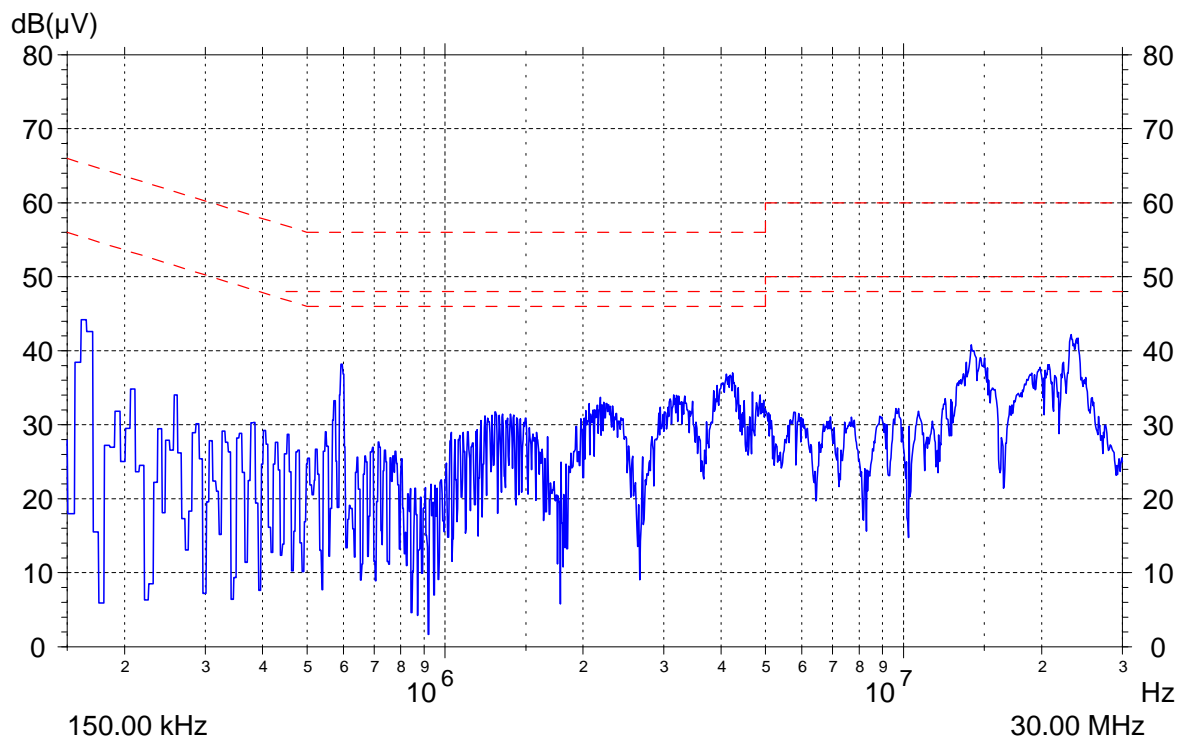

1.6 Meßblatt Störspannung (150kHz-30MHz) 230V L1 Peak

E.U.T. : CamTel svr 10 SN: TV180001 mit Netzteil A2-50S12R-V SN: R00111700013

Test Procedure: DIN EN 55022

Comment :

Test Engineer : P.Sell

Receiver : ESS

Start Freq.	Stop Freq.	Bandw.	Step	Detector	Transducer
150.000 kHz	30.000 MHz	9 kHz-10 kHz	5.000 kHz	PEAK	Solar8028

